

SRA MOWER RANGE



Powerful and well balanced,
suitable for cutting long lush
grass right up to saplings.



QUALITY THAT'S BUILT TO LAST

WWW.ISEKI.CO.UK



SRA BRUSHCUTTER

Powerful, well balanced brushcutter that is capable of cutting anything it can drive over. From overgrown grassy areas, to abandoned woodland paths with thick undergrowth, right up to saplings.

Due to the low centre of gravity, the SRA range can also tackle slopes up to 25 degrees with ease and comfort, making it the ideal mower for all hard to get to areas where your regular mower will not be able to access.

All this whilst also being able to leave a tidy finish on finer grassed areas, it is a true allrounder.



WHICH ONE TO CHOOSE?




SRA800A 14hp
80cm width deck
Slope capability 15°
2WD



SRA950FA 21hp
95cm width deck
Slope capability 25°
4WD



POWERFUL
14hp or 21hp Kawasaki petrol engine with pressurised oil system ensures the engine is constantly supplied with oil to avoid damage when working on slopes and undulating terrain.

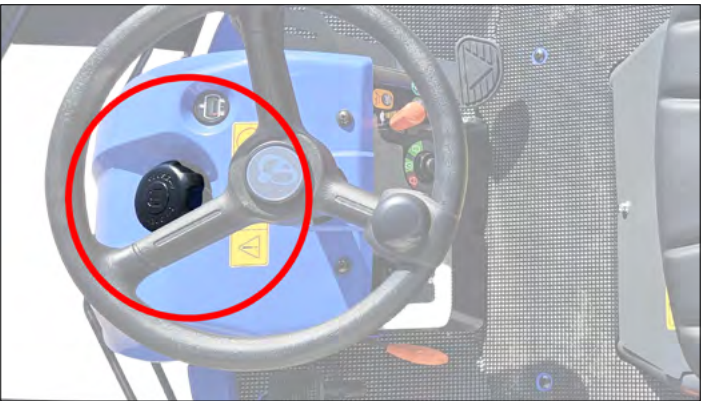


ULTIMATE PRODUCTIVITY
Large 14 litre tank and easy filling at the front of the machine offers the ultimate productivity, allowing you to work for longer periods of time before refilling.



ALL-TERRAIN
The Iseki SRA 800A and 950FA ride-on brushcutters are engineered for all-terrain mowing, and its front-axle suspension system is a key part of that performance.

Designed to keep the front wheels firmly in contact with uneven ground, the suspension improves traction, steering precision, and operator comfort even on steep banks or rough paddocks.

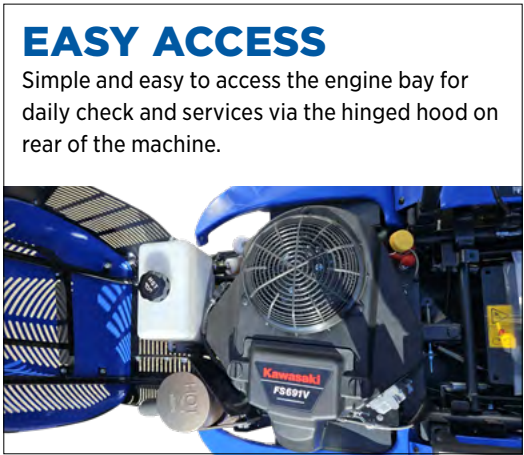

EASY ACCESS
Simple and easy to access the engine bay for daily check and services via the hinged hood on rear of the machine.

BRUSHCUTTING AT ITS BEST

SAFE DECK ENGAGEMENT

Deck engagement is done by a simple lever to the left of the operator platform, when lowered the clutch is engaged and starts the blades.

Yellow = deck controls
Orange = transmission

HEIGHT OF CUT ADJUSTMENT

Height of cut is easily and accurately adjusted by the manual lever to the right of the operators platform.

A lockable adjuster on the height of cut so you can pre-set the minimum height you want to cut at, then you can lift and lower the height of cut when you are out mowing to suit the area.



ALL TERRAIN MOWING

Available with OnDemand 4WD, the SRA950FA mower is capable of working on really rough terrain.

Whether cutting through dense overgrown vegetation, to wet grassy slopes the SRA brushcutter with its low centre of gravity has supreme traction.



HIGHLY MANOEUVRABLE



SIMPLE HST TRANSMISSION

Hydrostatic transmission with a single forward and reverse pedal offers effortless manoeuvring around obstacles, changing directions and speed whilst out cutting through undergrowth and overgrown areas.



HAND CONTROLS

Forward and reverse movement can also be changed by using the hand lever to the right of the operator seat instead of the foot pedals, this can be a much easier way to operate the mower when constantly changing speeds and directions, for example cutting thick undergrowth.



ECO MODE

The engine revs can be lowered so that 80% of full power is produced, reducing fuel consumption and noise, ideal for use in less demanding conditions.



DIFF LOCK FOR EXTRA TRACTION

Should you need to traverse very muddy or slippery ground the diff-lock can be engaged ensuring that full power is applied to all four wheels to keep you moving.


TACKLING SLOPES AND INCLINES

SRA 800A




The SRA800A can comfortably handle up to 15° with ease, ideal for undulations and uneven footpaths.

SRA950FA

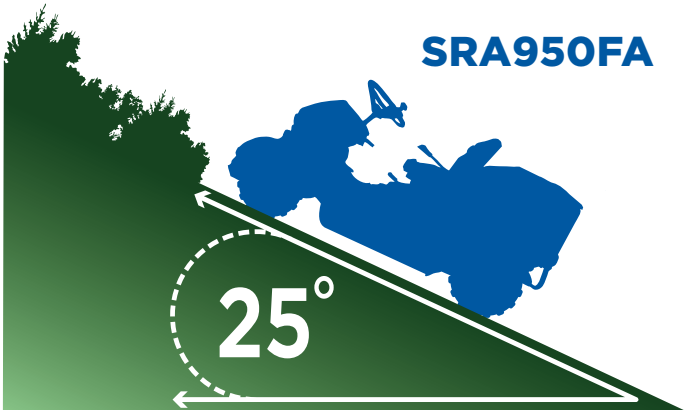

Designed with a very low centre of gravity and perfectly balanced, the SRA950FA is capable of brushcutting on slopes up to 25°.

DASHBOARD LAYOUT

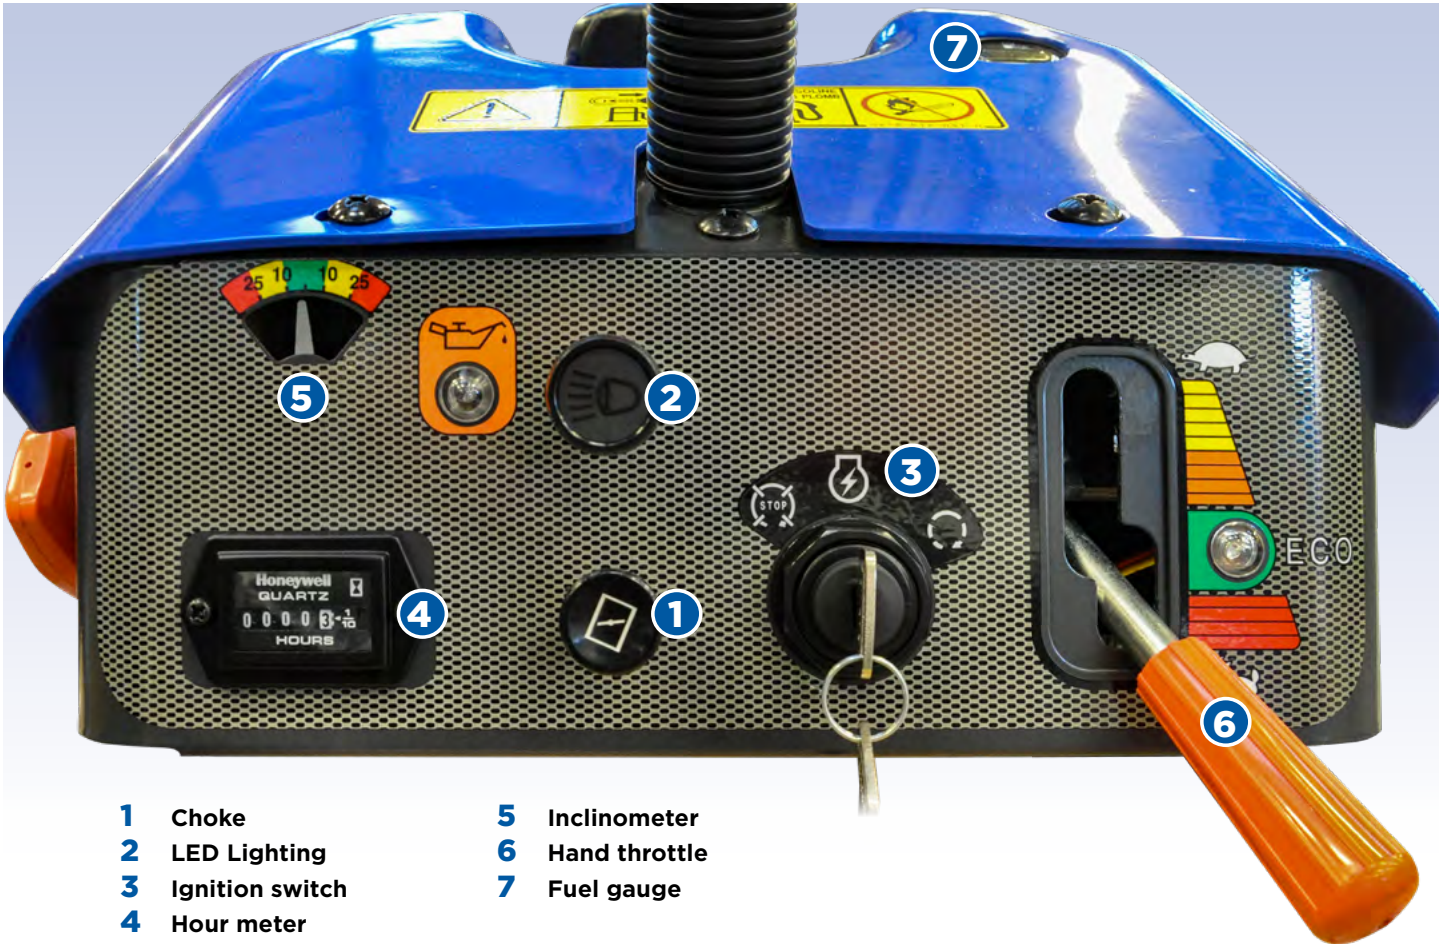

- 1

Choke
- 2

LED Lighting
- 3

Ignition switch
- 4

Hour meter
- 5

Inclinometer
- 6

Hand throttle
- 7

Fuel gauge

MODEL	SRA800A	SRA950FA
POWER		
Engine type	Kawasaki FS481V	Kawasaki FS691V
Power	14hp	21hp
Fuel Capacity	14ltr	14ltr

TRANSMISSION		
Type	HST, Hi-Low with diff lock	HST with diff lock
Slope capability	15°	25°
Driving system	2WD	On Demand 4WD

BRAKES		
Type	Internally expanding	Internally expanding
Diff lock	Standard	Standard
Minimum turning radius	1750mm	2100mm

TYRES		
Front	3.5-7	4.00-7
Rear	16 x 7.00-8	17 x 8.00-8

SPEED		
Forward	Low 5.8kmph - High 10kmph	10kmph
Reverse	Low 3.5kmph - High 6kmph	8.5kmph

DIMENSIONS		
Length	1880mm	1965mm
Width	920mm	1075mm
Overall height	905mm	955mm
Ground clearance	105mm	125mm
Weight	285kg	360kg
Steering wheel adjustment	0mm, 30mm, 60mm 3-step	0mm, 30mm 2-step
Seat Adjustment	Up to 30mm	Up to 60mm

MOWER DECK		
Blades	Single blade with two swing tips (reversible)	Single blade with two swing tips (reversible)
Discharge	Rear discharge rotary	Rear discharge rotary
Cutting width	800mm	950mm
Cutting height	20mm - 90mm	35mm - 125mm
Adjustments	Stepless dial	Stepless dial

SRA RANGE



Don't just take our word for it.

Try an ISEKI mower for yourself and book a demonstration with your local dealer.

Contact us today

01473 599266



QUALITY THAT'S BUILT TO LAST



WWW.ISEKI.CO.UK

